

RETROAIRE™

The Right Fit for Comfort

ECR International INC
2201 Dwyer Avenue
Utica, NY 13501
e-mail: info@RetroAire.com



An ISO 9001-2000 Certified Company



WM

R-410A High Efficiency Water Source Heat Pump

MODEL WM - Heat pump nominal capacities

9,000	12,000	15,000	Btuh
2.6	3.5	4.4	kW

Specifications and Performance



WM

Replacement for:
McQuay, Singer, or Climate Control WM
Series Water Source

Content

Contents

Contents	2
General Product Info	3-6
Model Nomenclature	7
Features	8
Performance Data	9
Electrical Specifications	9

NOTICE

The RetroAire™ Water Source Console Units are backed by EMI and ECR International and is tested and rated in accordance with:

AHRI Standard 320

UL-484

Due to ongoing product development, product designs and specifications may change without notice.

Please contact the factory for more information.

General Product Information

Product description

All RetroAire Water Source Console Units are available as heat pump systems. Model CW is available as a straight cool unit.

The Retroaire Water Source Console Units:

- Use R-410A refrigerant.
- Include high-efficiency rotary compressors, protected by a 5-year warranty.
- Include enhanced, high-efficiency heat exchangers.
- Offer two fan speeds.
- RetroAire Water Source Console Units ratings:
- WM Series Water Source Console Units are available in nominal sizes of 9,000 Btuh (2.6kW), 12,000 Btuh (3.5kW), or 15,000 Btuh (4.4kW).
- Energy Efficiency Rating(EER) in excess of 13.
- Coefficient of performance(COP) in excess of 4.

Standard controls and components

Construction

- 20-gauge galvanized steel Water Source Console Units construction of chassis.
- Powder-coated evaporator drain pan.
- Foam strip seal for supply air duct.

Air systems

- Indoor fan motor is are thermally-protected PSC type.
- Air-stream surfaces are insulated with 1/4" fiber-glass or 1/8" (3.2 mm) Volara™.
- The indoor fan is a foward-curved type, directly mounted to the motor shaft.

Controls

- Unit-mounted operating controls include thermostat, fan speed control and heat/cool switch.
- Remote mount controls include fan speed control.

- High pressure switch.
- Low Temperature/Low water flow cut out switch compressor lock out relay
- 4-Way reversing valve with solenoid activated by line voltage. Solenoid is energized for cooling mode. (Heat pump models only)

Factory-installed options (see model nomenclature)

- Voltage
- Electric Heat/Hydronic Heat
- Piping
- Cabinet options
- Pipe connection
- Control

Field-installed accessories

- Remote thermostat
- Hydronic heat valves
- Cabinets

NOTICE

RetroAire units can be equipped with either unit-mounted or remote controlled thermostats. Specify when ordering.

General Product Information

Figure 1 WM Chassis (Left)




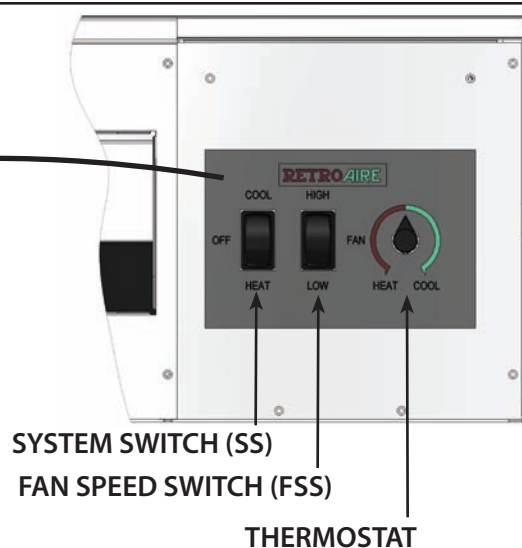


Figure 2 WM Chassis (Right)

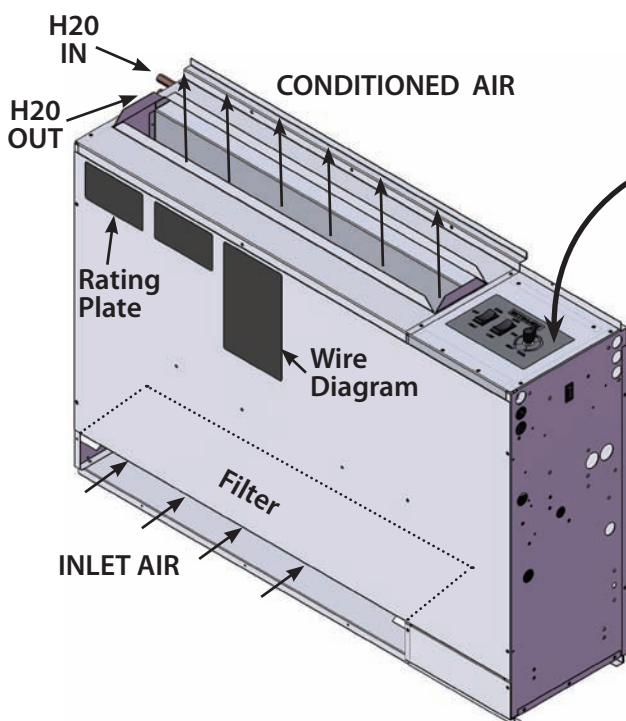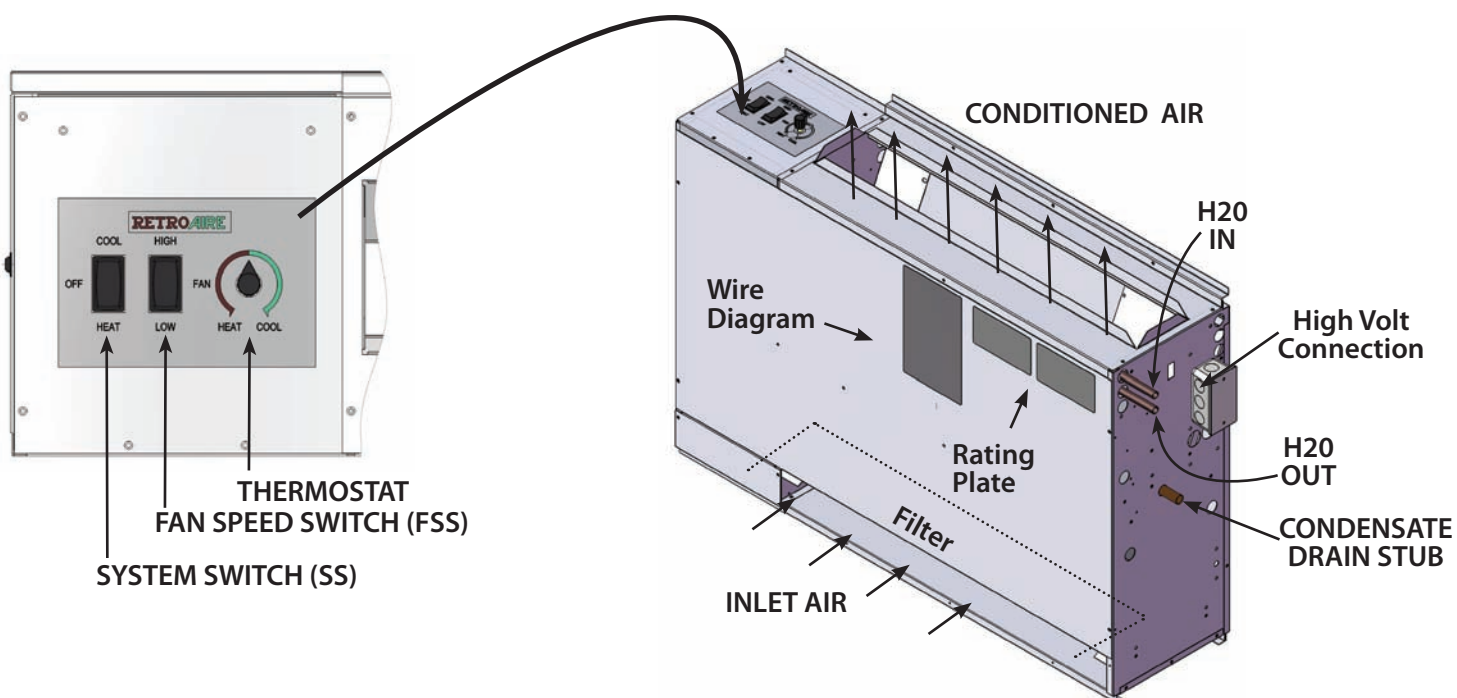


General Product Information — WM Left

Figure 3 WM chassis

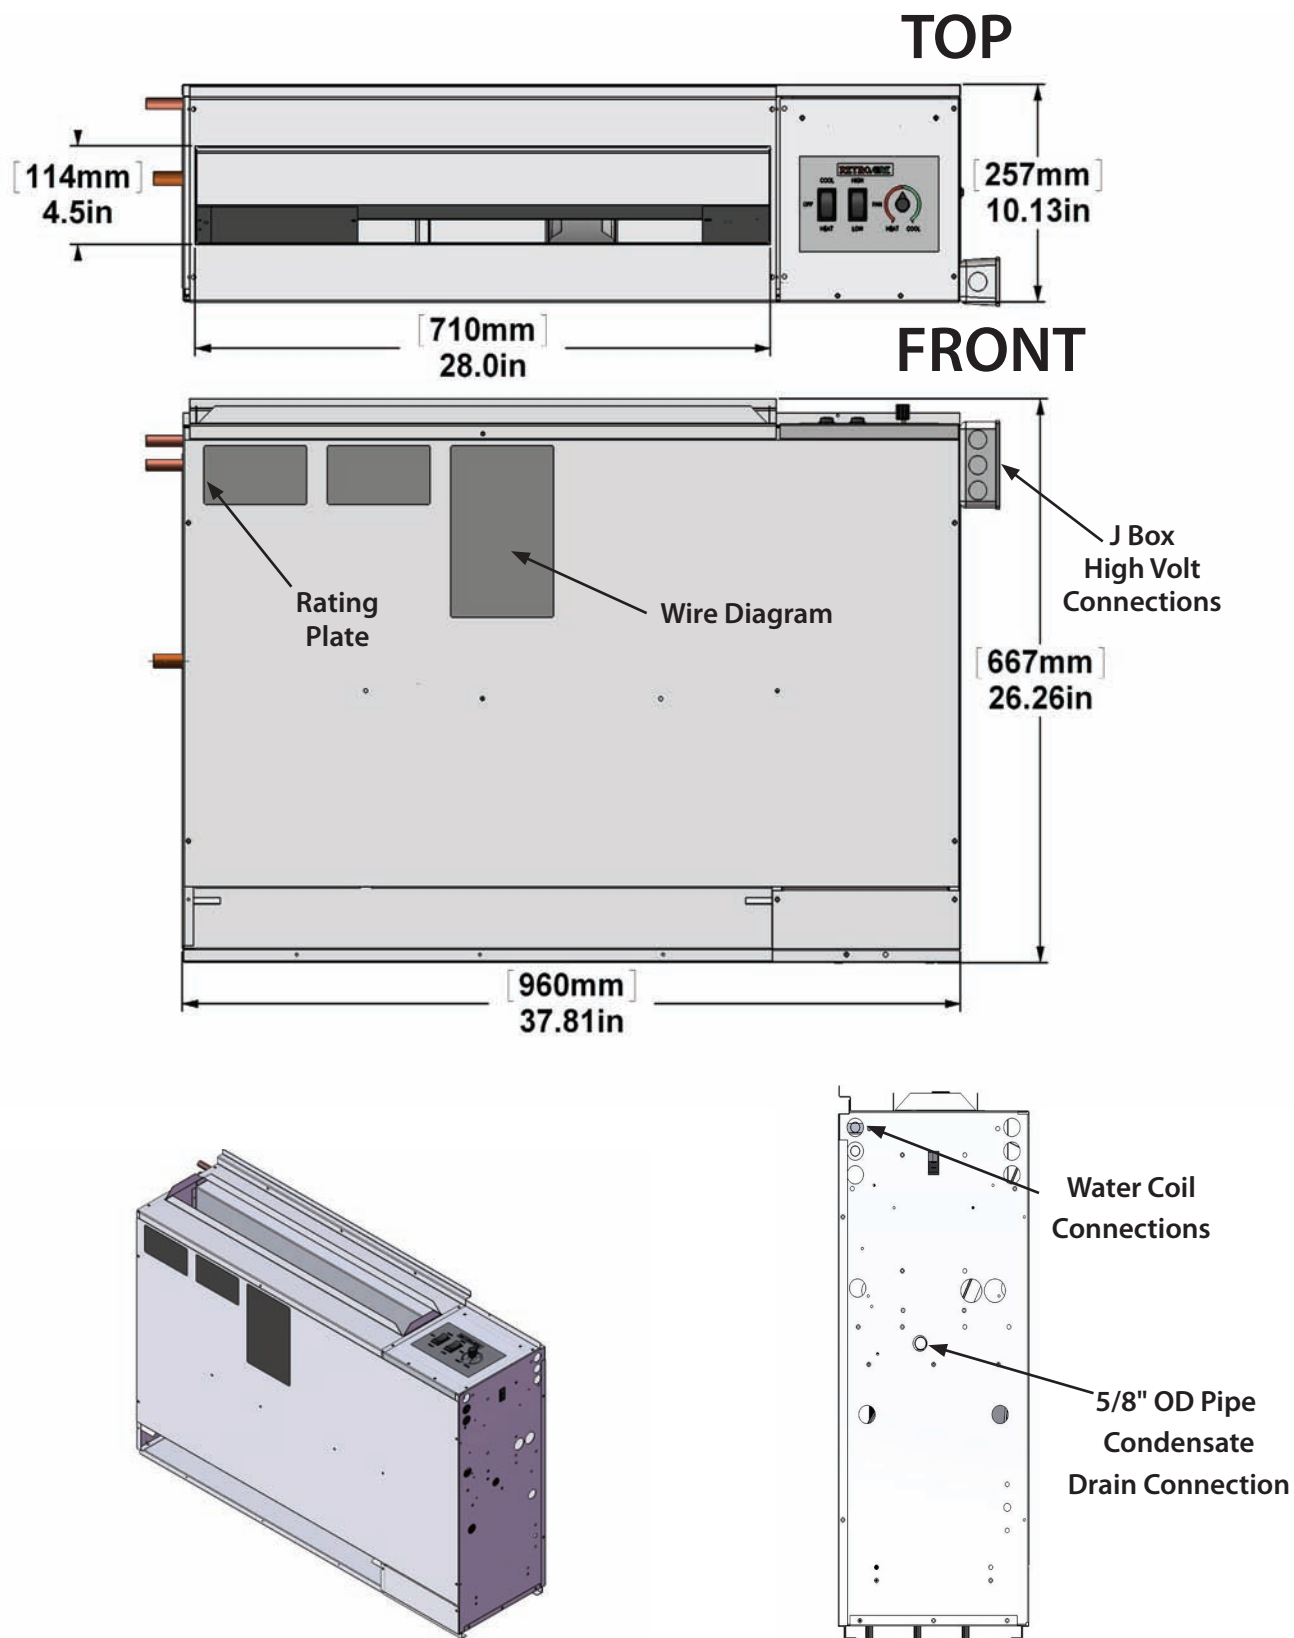

General Product Information — WM Right

Figure 4 WM Right chassis and installation kit contents

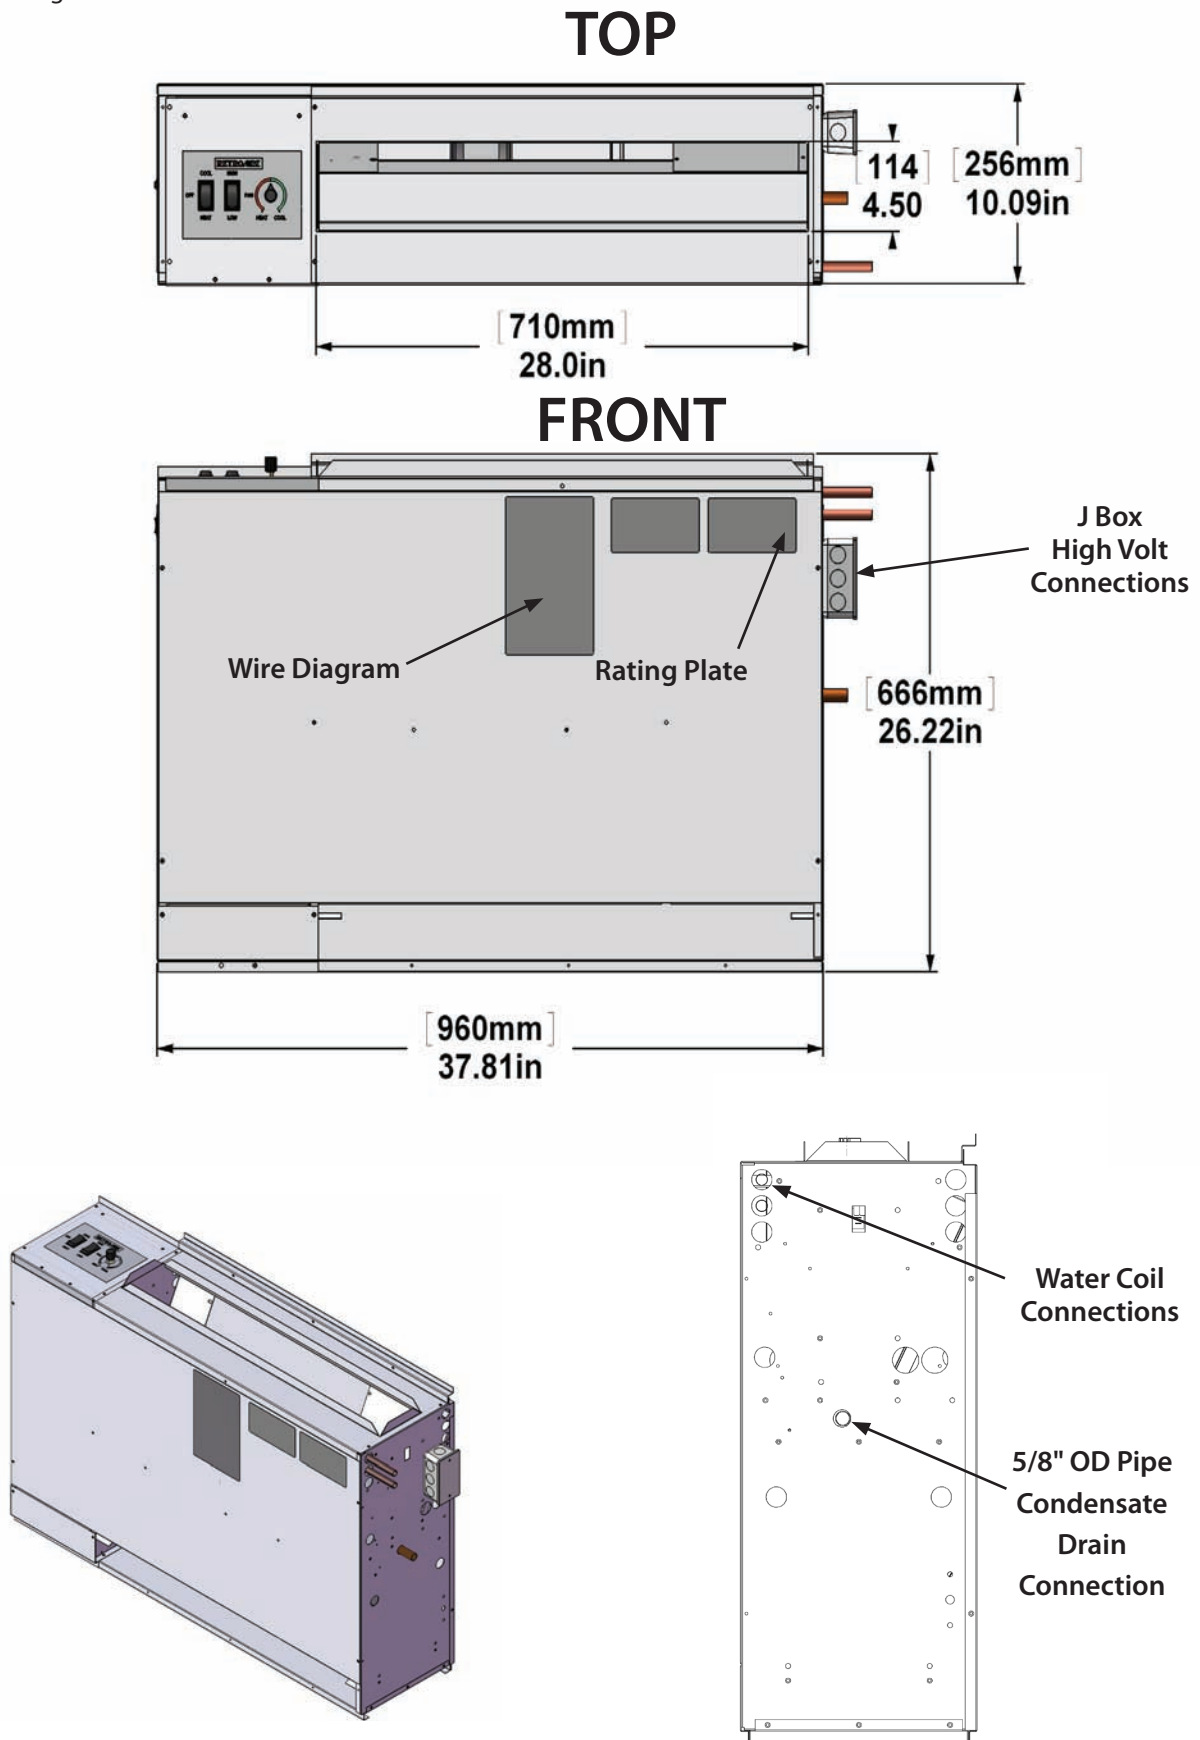

CM, CW, WM Model Nomenclature

Figure 5 Model coding

Position number:	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Chassis coding [verify with rating plate]															
Product Series	[CM series]			[CW series]			[WM series]						Design Revision [A = Rev Level]		
Straight cool or Heat Pump	[C = straight cooling (CW Series Only)]			[H = heat pump unit]									Standard/Special [0 = standard] [A-Z = special option]		
Refrigerant G = 410A													Compressor Code [A = Tech] [L = LG] [T = Toshiba]		
Cooling Capacity (Btuh)	[08 = 08,000 Btuh (CM and CW Series Only)]			[09 = 09,000 Btuh (WM Series Only)]			[10 = 10,000 Btuh (CW Series Only)]			[12 = 12,000 Btuh (CM and WM Series Only)]			[13 = 13,000 Btuh (CW Series Only)]		
	[15 = 15,000 Btuh (CM and WM Series Only)]			[17 = 17,000 Btuh (CW Series Only)]									Pipe Connections [0 = Sweat Connection] [1 = Female Pipe Thread] [2 = Male Pipe Thread] [3 = Ball Valve & Union] [4 = Sweat Connection with Cupronickel Water Coil] [5 = Female Pipe thread with Cupronickel Water Coil] [6 = Male Pipe thread with Cupronickel Water Coil] [7 = Ball Valve & Union with Cupronickel Water Coil]		
Voltage	[A = 115 V / 1 / 60] (CW Series Only)			[D = 208/230 V / 1 / 60]			[E = 265/277 V / 1 / 60]						Cabinet Options [A = No Cabinet] [B = With Cabinet (CW Series Only)] [C = Cabinet with Locking Door (CW Series Only)] [D = Front Air Intake (CW Series Only)]		
Heat Options (230 Volts)	[0 = No electric heat]			[2 = 2 kW electric heat]			[3 = 3 kW electric heat]			[4 = 4 kW electric heat]			[5 = 5 kW electric heat]		
	[6 = 1 Row Hydronic Coil N/C Valve (CWC Right Hand Pipe Only)]			[7 = 1 Row Hydronic Coil N/O Valve (CWC Right Hand Pipe Only)]									Piping Options [L = Left Hand Piping] [R = Right Hand Piping] [M = Left Mono Flow Piping] [N = Right Mono Flow Piping]		
Control Options	[0 = Unit Mount MCO]			[1 = Unit Mount MCO Boiler less (Heat pump with Electric Heat Only)]			[2 = Unit Mount MCO with Disconnect Switch]			[3 = Unit Mount MCO Boilerless (Heatpump with Elect Heat Only)]			[4 = Unit Mount ACO]		
	[5 = Unit Mount ACO Boilerless (Heat Pump with Elect Heat Only)]			[6 = Unit Mount ACO with Disconnect Sw.]			[7 = Unit Mount ACO Boilerless (Heat Pump with Elect Heat Only and Disconnect Sw.)]						Control Options (Con't) [A = Remote] [B = Remote Master / Slave] [C = Remote with Disconnect Sw.] [D = Remote Master / Slave with Disconnect Sw.] [E = Remote Boilerless (Heat Pump with Elect Heat Only)] [F = Remote Master / Slave Boilerless (Heat Pump with Elect Heat Only)] [G = Remote with Boilerless (Heat Pump with Elect Heat Only) and Disconnect Sw.] [H = Remote Master / Slave with Boilerless (Heat Pump with Elect Heat Only) and Disconnect SW.]		

Features

Indoor coil freeze protection *(standard)*

This feature will prevent the indoor coil from freeze up in the cooling mode.

- Indoor coil freeze up can occur due to a dirty air filter, restricted or poor air flow, low refrigerant charge or low room or coil water temperatures.
- Low temperature water flow cut-out switch.
- High pressure control.
- Should a freeze condition be detected, the compressor will be switched off until the freeze condition is satisfied.
- During this time the indoor fan will continue to run to aid in the defrost process.

Power cord with integral safety protection *(optional)*

Water Source Console Units have the option of a power cord with internal safety protection.

- Provides personal shock protection as well as arcing and fire prevention. The device is designed to sense any damage in the line cord and disconnect power before a fire can occur.
- Tested in accordance with Underwriters Laboratories, the cord set also offers a unique “passive” operation, meaning the unit does not require resetting if main power is interrupted.

Heat pump

Heat pumps are designed to operate when entering water temperature is between 60°F (16°C) to 90°F (33°C) and with a maximum indoor air temperature of 80°F (27°C). The unit is equipped with a reversing valve that is energized for cooling and de-energized in heating mode.

Hydronic heating *(optional)*

An optional hydronic heat package may be selected in lieu of electric heat. Heating operation is essentially the same as that of units with electric heat.

Optional wall-mounted thermostats

Thermostats available from EMI

EMI offers a thermostat that is compatible with your Water Source Console Unit.

- Select EMI part number 240008208 for the latest RetroAire price list for this option. This is a single stage, cool/heat, thermostat that can be used in all RetroAire cooling, heating or heat pump applications.
- The thermostat has an adjustable setpoint range of between 45°F (7°C) and 90°F (32°C).
- For heat pumps another option is EMI part number 240008209. This is a 2 stage heat/cool thermostat which allows for emergency heat.

Selecting a thermostat *(by others)*

When selecting a thermostat other than one offered by EMI, choose a single stage heat/cool, 24v thermostat.

Straight cooling with electric heat or hydronic heat

Select a thermostat that is compatible with a cooling/electric heat system. The thermostat should have “R”, “Y”, “W” and “G” terminals.

Heat pump

Select a thermostat that is compatible with a cooling/single-stage heat/heat pump system. The thermostat should have “R”, “Y”, “O” and “G” terminals. RetroAire units are single stage heating only.

Table 1 Performance Data

PERFORMANCE DATA WM **							
Voltage	Model	Cooling		Heat Pump		Indoor Airflow CFM (L/S)	Shipping Weight Lbs (Kg)
		Btuh (kW)	EER	Btuh (kW)	COP		
115V	WMHG09	9,200 (2.7)	12.9	10,000 (3.0)	3.8	350 (165)	150 (68)
	WMHG12	12,400 (3.6)	13.1	13,600 (4.0)	4.1	450 (212)	160 (73)
208/230V	WMHG09	9,200 (2.7)	12.9	10,000 (3.0)	3.8	350 (165)	150 (68)
	WMHG12	12,400 (3.6)	13.1	13,600 (4.0)	4.1	450 (212)	160 (73)
	WMHG15	17,500 (5.1)	11.9	19,500 (5.7)	3.7	550 (260)	170 (77)
265V	WMHG09	N/A	N/A	N/A	N/A	N/A	N/A
	WMHG12	12,400 (3.6)	13.1	13,600 (4.0)	4.1	450 (212)	160 (73)
	WMHG15	17,500 (5.1)	11.9	19,500 (5.7)	3.7	550 (260)	170 (77)

****Cooling -**

ID EAT 80°F (26.7°C) DB/67°F (19.4°C)WB
EWT 85°F (29.4°C)

****Heating -**

ID EAT 70°F (21.1°C) DB
EWT 70° (21.1°C)

Electrical Specifications

IMPORTANT

Due to ongoing product development, designs, specifications, and performance are subject to change without notice. Please consult the factory for further information.

Table 2 WMHG 09 electrical specifications



Power Supply Volt — 1–60		Compressor		Indoor Fan Motor		Electric Heat				Unit Electrical Ratings				
Volt	Min	RLA	LRA	FLA	Hp	Htr #	Volt	W	HA	TCA	THA	MCA	MOCP	Plug
115V	104	7.5	47	1.4	0.09	0	N/A	N/A	N/A	8.9	N/A	10.8	15	5-15P
208/ 230V	197	3.9	20	0.6	0.08	0	N/A	N/A	N/A	4.5	N/A	5.5	15	6-15P
						2	208	1636	7.9		8.5	10.4	15	6-15P
							230	2000	8.7		9.3	11.5		
						3	208	2454	11.8		12.4	15.3	20	6-20P
							230	3000	13		13.6	16.9		

Table 3 WMHG 12 electrical specifications

Power Supply Volt — 1–60		Compressor		Indoor Fan Motor		Electric Heat				Unit Electrical Ratings				
Volt	Min	RLA	LRA	FLA	Hp	Htr #	Volt	W	HA	TCA	THA	MCA	MOCP	Plug
115V	104	9.9	53	1.4	0.09	N/A	N/A	N/A	N/A	11.3	N/A	13.8	20	5-15P
208/ 230V	197	5.2	27	0.6	0.08	0	N/A	N/A	N/A	5.8	N/A	7.1	15	6-15P
						2	208	1636	7.9		8.5	10.4	15	6-15P
							230	2000	8.7		9.3	11.5		
						3	208	2454	11.8		12.4	15.3	20	6-20P
							230	3000	13		13.6	16.9		
265V	240	4.6	20	0.67	0.08	0	N/A	N/A	N/A	5.3	N/A	6.4	15	7-20P
						2	265	2655	10		10.7	13.2	15	7-20P
						3	265	3983	15		15.7	19.5	20	
						4	265	5310	20		20.7	25.7	30	7-30P

Electrical Specifications

IMPORTANT

Due to ongoing product development, designs, specifications, and performance are subject to change without notice. Please consult the factory for further information.

Table 4 WMHG 15 electrical specifications



Power Supply Volt — 1–60		Compressor		Indoor Fan Motor		Electric Heat				Unit Electrical Ratings				
Volt	Min	RLA	LRA	FLA	Hp	Htr #	Volt	W	HA	TCA	THA	MCA	MOCP	Plug
208/ 230V	197	7.4	33	0.6	0.08	0	N/A	N/A	N/A	8.0	N/A	9.9	15	6–15P
						2	208	1636	7.9		8.5	10.4	15	6–15P
							230	2000	8.7		9.3	11.5		
						3	208	2454	11.8		12.4	15.3	20	6–20P
							230	3000	13.0		13.6	16.9		
						265V	240	6.0	28		0.67	0.08	0	N/A
2	265	2655	10	10.7	13.2					15			7-20P	
3	265	3983	15	15.7	19.5					20				
4	265	5310	20	20.7	25.7					30			7-30P	

Figure 6 NEMA Specifications Non / Locking / Receptacles

VOLTAGE	125V		250V			265V		
	15(A)	20(A)	15(A)	20(A)	30(A)	15(A)	20(A)	30(A)
PLUG								
	5-15 P	5-20 P	6-15 P	6-20 P	6-30 P	7-15 P	7-20 P	7-30 P
RECEPTACLE								
	5-15 R	5-20 R	6-15 R	6-20 R	6-30 R	7-15 R	7-20 R	7-30 R

ECR International LLC
2201 Dwyer Avenue
Utica, NY 13501
e-mail: info@RetroAire.com



An ISO 9001-2000 Certified Company