

Specifications, Performance & Submittal

Model:
Ceiling Cassette
208-230V
9k-24k

Ceiling Cassette Air Handler (Heat Pump)

Model				Capacity	Voltage	Product Revision
C	A	S	H		D	A
Ceiling Cassette Heat Pump				09 - 9,000 Btu/h 12 - 12,000 Btu/h 18 - 18,000 Btu/h 24 - 24,000 Btu/h	D - 208-230V/1ph/60Hz	

Indicate the *quantity* of field installed accessories, required for each unit

QTY Ordered	Description	Part Number
	Assembly, Facia, CASH 09/12/18 - Facia is packaged and sold separately [1 per unit 09 / 12 / 18 required]	TMBQ403E
	Assembly, Facia, CASH 24 - Facia is packaged and sold separately [1 per unit is required]	TMBQ02C1
	Optional: Wall Thermostat for Iverter & Deluxe Heat, Fahrenheit	KJR12BDPTF1
	Optional: Wall Thermostat for Iverter & Deluxe Heat, Celsius	KJR12B
	Optional: SPARE Hand Held Infrared Remote Control [NOTE: Each Wall Air Handler comes with a hand held remote, standard]	17317000A14903




Approved:	
Reviewed:	
Contact:	
Address:	
Phone:	
Unit Tag #	
REVISION	

**Number of Units
Ordered**

Approval
By: _____

NOTICE: Due to ongoing product development; design, specification and performance data listed within this submittal document are subject to change without notice. Visit our website emiretroaire.com for the most current performance data or consult the factory.

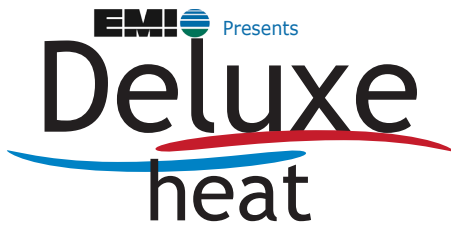

Specifications, Performance & Submittal

Model:
Single Zone
Condenser
208-230V
9k-24k

Single Zone Condenser (Heat Pump)

Model		Single Zone			Nominal Rated Capacity	Voltage	Product Revision
D	H	S	Z	1		D	A
Deluxe Heat Series Heat Pump					09 - 9,000 Btu/h 12 - 12,000 Btu/h 18 - 18,000 Btu/h 24 - 24,000 Btu/h	D - 208-230V/1ph/60Hz	

Indicate the *quantity* of field installed accessories, required for each unit

QTY Ordered	Description	Part Number	Notes
	TUBE SET,3/8X1/4X16',5M,09,FLR,INS,US	F0323161A	09 size only
	TUBE SET,3/8X1/4X26',8M,09,FLR,INS,US	F0323261A	09 size only
	TUBE SET,3/8X1/4X49',15M,09,FLR,INS,US	F0323491	09 size only
	TUBE SET,1/2X1/4X16',5M,12-18,FLR,INS,US	F0423161A	12 & 18 sizes
	TUBE SET,1/2X1/4X26',8M,12-18,FLR,INS,US	F0423261A	12 & 18 sizes
	TUBE SET,1/2X1/4X49',15M,12/18,FLR,INS,	F0423491	12 & 18 sizes
	TUBE SET,5/8X3/8X26',8M,24-36,FL,INS,US	F0533262A	24 size only
	TUBE SET,5/8x3/8X49',15M,24-36,FL,INS,US	F0533492A	24 size only

Number of Units
Ordered



Approved:	
Reviewed:	
Contact:	
Address:	
Phone:	
Unit Tag #	
REVISION	

Approval

NOTICE: Due to ongoing product development; design, specification and performance data listed within this submittal document are subject to change without notice. Visit our website emiretroaire.com for the most current performance data or consult the factory.

Ductless Mini Split:

- ◆ Heat Pump
- ◆ R-410A refrigerant.
- ◆ Single and multi-zone application flexibility.
- ◆ 20 to 25 SEER high efficiency models with capacities from 9,000 Btu/h to 24,000 Btu/h.
- ◆ Easy installation requiring no ductwork, a small hole for running power wiring and refrigerant lines is all that is needed to connect indoor and outdoor sections.
- ◆ Low profile indoor air handler is neutral color that blends with any decor.
- ◆ Next generation outdoor condenser with inverter compressor provides exceptionally quiet operation and intelligently adjusts speed to temperature conditions.
- ◆ Low noise.
- ◆ Low operating cost.
- ◆ Optional Wall Thermostat.
- ◆ Simple design makes it easy to remove and clean the washable filters.
- ◆ Intelligent Design allows system to intelligently adjust the angle of the louver to ensure greatest efficiency for heating and cooling. For more control, manually adjust louver as small as 6 degrees from using the hand-held remote.
- ◆ Golden Fin prevents bacteria breeding and improves heat transfer efficiency. The unique anti-corrosive golden coating on the condenser can withstand salty air, rain, and other corrosive elements.
- ◆ Refrigerant Leakage Detection will better protect compressor being damaged by high temperature due to refrigerant leakage.

Features:

- All models supplied with hand-held Infrared Remote Controller with easy-to-read LCD display. Factory installer operating features provide capacity to set temperature, louver control, fan speeds and more.
- Follow-Me Technology - Mode that activates a temperature sensor that is built into Infrared remote control. When you stay close to the remote control, the unit will continue to condition the space until you are comfortable.
- Turbo Mode - Air condition maximizes output of cooling and heating capacity, making the room cool down or heat up rapidly and attain the desired temperature in the shortest time.
- Auto Restart - If system shuts down due to power failure, system will restart with previous function setting when power is restored.
- Auto Level Swing Louvers - In cooling mode, louvers self adjust to horizontal position and circulate cold air more efficiently. In heating mode, louvers deflect hot air downward so hot air will rise and circulate keeping the room warm.
- 24 Hour Timer - Set a wide variety of timer based operations, start and stop at specific times. Control fan speed as well as cool, heat and auto from anywhere in the room.
- Sleep Mode - Enables the system to gradually decrease cooling or heating output automatically during night operation to maintain comfort level while saving energy.
- Self-Diagnosis & Auto Protection - Should abnormal operation or part failure happen, unit will shut off automatically. Unit will then indicate protection or error code for fast service.
- Low Ambient Cooling/Heating - Operating range -22°F to 122°F provide year round cooling/heating comfort.
- Enhanced features - Compatible with after market Wi-Fi controllers.

Single - Zone Systems

208V-230V 9-24K

Indoor Cassette Unit Model			CASH09DAA	CASH12DAA	CASH18DAA	CASH24DAA
Power Supply		V/ph/Hz	208-230/1/60	208-230/1/60	208-230/1/60	208-230/1/60
Cooling	Nominal Capacity	Btu/h	9000	12000	17000	24000
	EER		14.5	13.0	12.5	13
	SEER		25	22.5	20	20.5
Heating	Capacity	Btu/h	10900	12000	18000	24000
	HSPF4		11.2	12	10.3	11.5
Indoor air flow (Hi/Mi/Lo)		cfm	374/301/257	379/309/261	560/483/415	700/636/573
Indoor noise level (Hi/Mi/Lo)		dB(A)	41/37/33	43/39/36	44/39/36	51/47/43
Indoor Unit	Dimensions (WxDxH)	inch	22 ⁷ / ₁₆ × 22 ⁷ / ₁₆ × 10 ¹ / ₄	22 ⁷ / ₁₆ × 22 ⁷ / ₁₆ × 10 ¹ / ₄	22 ⁷ / ₁₆ × 22 ⁷ / ₁₆ × 10 ¹ / ₄	35 ⁷ / ₁₆ × 35 ⁷ / ₁₆ × 8 ⁹ / ₁₆
		mm	570 × 570 × 260	570 × 570 × 260	570 × 570 × 260	900 × 900 × 217
	Weight	lbs.	38.5	41	41.5	54.5
		kg	17.5	18.6	18.8	24.7
Indoor Unit Facia	Dimensions (WxDxH)	inch	28 ¹ / ₈ × 28 ¹ / ₈ × 4 ¹³ / ₁₆	28 ¹ / ₈ × 28 ¹ / ₈ × 4 ¹³ / ₁₆	28 ¹ / ₈ × 28 ¹ / ₈ × 4 ¹³ / ₁₆	40 ³ / ₄ × 40 ³ / ₄ × 3 ⁹ / ₁₆
		mm	715 × 715 × 123	715 × 715 × 123	715 × 715 × 123	1035 × 1035 × 90
Indoor Fan		RLA	0.9	1.0	1.5	2
Thermostat Setting Range	Indoor (cooling/heating)	°F	62~90 / 32~86	62~90 / 32~86	62~90 / 32~86	62~90 / 32~86
		°C	17~32 / 0~30	17~32 / 0~30	17~32 / 0~30	17~32 / 0~30
Refrigerant Piping	Liquid side/Gas side	inch	¼ × ⅜	¼ × ½	¼ × ½	⅜ × ⅝
		mm	6.35 × 9.52	6.35 × 12.7	6.35 × 12.7	9.52 × 15.9
	Maximum pipe length	ft	82	82	98	164
		m	25	25	30	50
	Max. height difference between indoor units	ft	33	33	66	82
		m	10	10	20	25

Interconnect wire: 3 - conductor plus ground, stranded, un-shielded. Wire size is determined by MCA and MOP/fuse, per NEC, CEC and local codes.

Single - Zone Systems

208V-230V 9-24k

Outdoor Condensing Unit Model			DHSZ109DA	DHSZ112DA	DHSZ118DA	DHSZ124DA
Power supply		V/ph/Hz	208-230/1/60	208-230/1/60	208-230/1/60	208-230/1/60
Cooling	Capacity	Btu/h	9000	12000	17000	24000
	Input	W	620	960	1360	1920
	Rated current	A	2.7	4.2	5.95	8.4
	EER		14.5	13	12.5	13
	SEER		25	22.5	20	20.5
Heating	Capacity	Btu/h	10900	12000	18000	24000
	Input	W	835	975	1685	2500
	Rated current	A	3.6	4.2	7.4	10.9
	COP		3.83	3.55	3.13	2.81
	HSPF4		11.2	12	10.3	11.5
	HSPF5		9	9.9	8.8	9.6
MINIMUM CIRCUIT AMPACITY		A	9	9	18	20
MAX TIME DELAY FUUSE OR HARC BREAKER		A	15	15	25	30
Outdoor air flow		m3/h	1900	2000	2300	4000
Outdoor air flow		cfm	1120	1180	1355	2355
Outdoor noise level		dB(A)	55.5	56	57.5	60
Outdoor unit	Dimension (WxDxH)	inch	31½ × 13⅛ × 21⅜ ₁₆	31½ × 13⅛ × 21⅜ ₁₆	33¼ × 14¼ × 24⅝ ₈	37¼ × 16⅛ × 31⅞ ₈
		mm	800 × 333 × 554	800 × 333 × 554	845 × 362 × 626	946 × 410 × 810
	Packing (WxDxH)	inch	36¾ ₁₆ × 15⅝ ₁₆ × 24¾ ₁₆	36¾ ₁₆ × 15⅝ ₁₆ × 24¾ ₁₆	38 × 15⅞ ₁₆ × 29⅜ ₁₆	42⅞ ₈ × 19⅜ ₁₆ × 34⅞ ₁₆
		mm	919 × 389 × 614	919 × 389 × 614	965 × 395 × 754	1089×500×875
	Net/Gross weight	lbs.	88.2/93.7	88.2/93.7	107.4/115.1	135.58/148.81
		kg	40/42.5	40/42.5	48.7/52.2	61.5/67.5
Refrigerant type - 410A / oz		oz	52.9	52.9	68.8	91.7
Refrigerant precharge (Total pipe length)		ft	25	25	25	25
Additional charge for each ft		oz	0.161	0.161	0.161	0.322
Design pressure		psig	550/340	550/340	550/340	550/340
Refrigerant piping	Liquid side/Gas side	inch	1/4 liquid line 3/8 gas line	1/4 liquid line 1/2 gas line	1/4 liquid line 1/2 gas line	3/8 liquid line 5/8 gas line
		mm	6.35 liquid line 9.52 gas line	6.35 liquid line 12.7 gas line	6.35 liquid line 12.7 gas line	9.52 liquid line 15.9 gas line
	Max. pipe length	ft	82	82	98	164
		m	25	25	30	50
	Max. height difference between indoor units	ft	33	33	66	82
		m	10	10	20	25
Operating Range Ambient Temperature	Indoor (cooling/heating)	°F	62~90 / 32~86	62~90 / 32~86	62~90 / 32~86	62~90 / 32~86
		°C	17~32 / 0~30	17~32 / 0~30	17~32 / 0~30	17~32 / 0~30
	Outdoor (cooling/heating)	°F	-22~122 / -22~86	-22~122 / -22~86	-22~122 / -22~86	-22~122 / -22~86
		°C	-30~50 / -30~30	-30~50 / -30~30	-30~50 / -30~30	-30~50 / -30~30


Additional Refrigerant Calculation: Sum Total Liquid Pipe ft. (m) - Additional Charge Required After ft. (m.) × Additional Charge oz./ft. (g/m) 0.16 (15)

NOTES: If the calculation results in a negative number no refrigerant is required to be added or removed. Electronic expansion valves in the outdoor unit are used as metering devices


NOTE: The refrigerant charge included is adequate for the outdoor unit's maximum number of zones multiplied by the standard piping length per zone. For piping runs greater than the "Maximum Piping Length with no additional refrigerant charge per System", see Additional Refrigerant Charge (see Table 3).

Refrigerant Piping: Line sets to be sized based on the connection size of the indoor unit. Each pipe should be insulated individually.


CASH09DAA, CASH12DAA, CASH18DAA

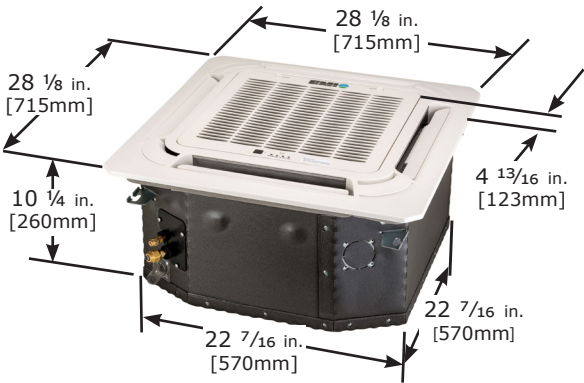


CASH24DAA

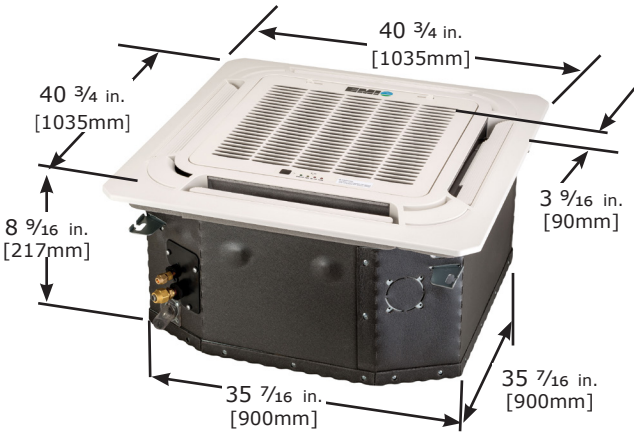


DHSZ109DA

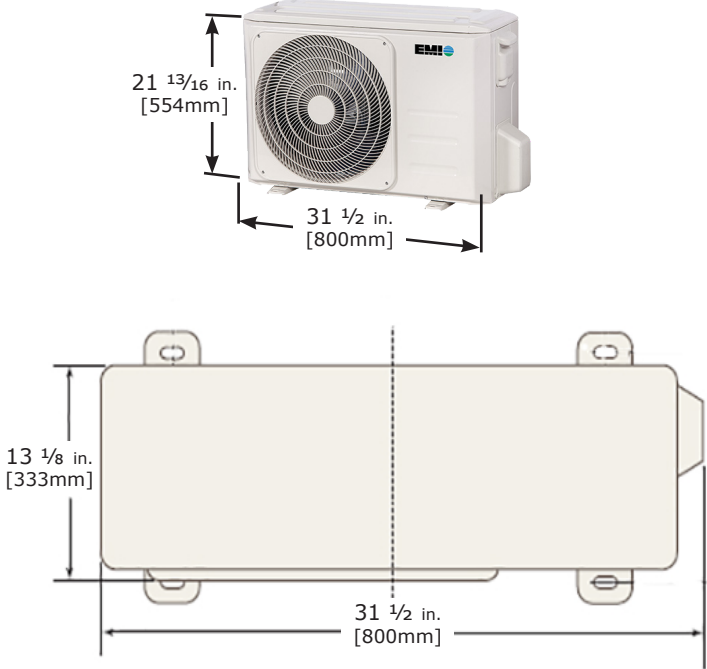


DHSZ112DA

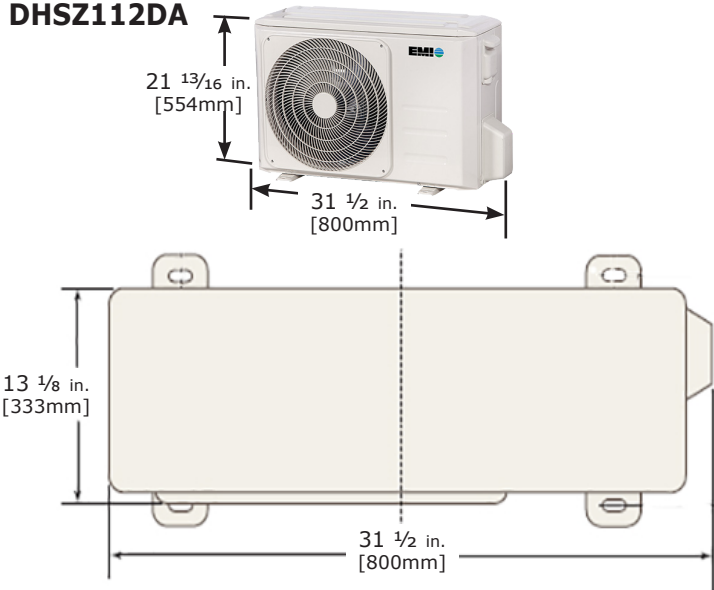

DHSZ118DA

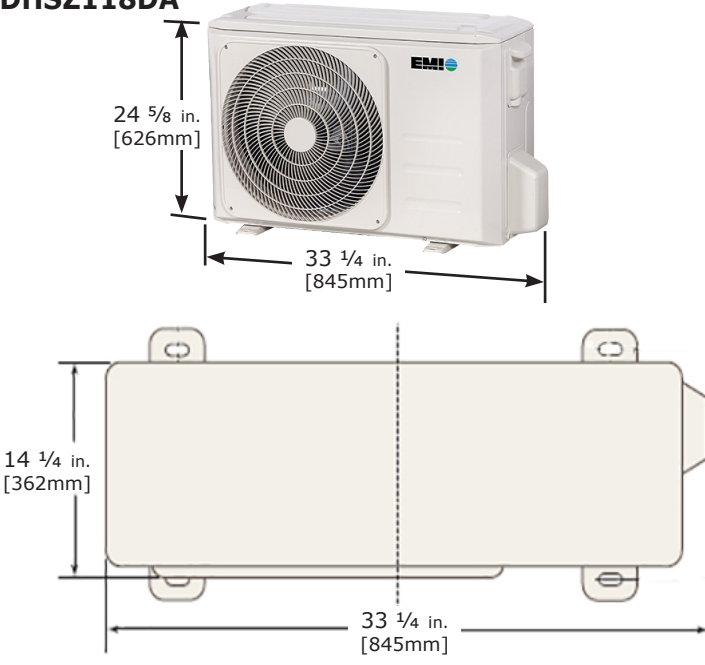

DHSZ124DA

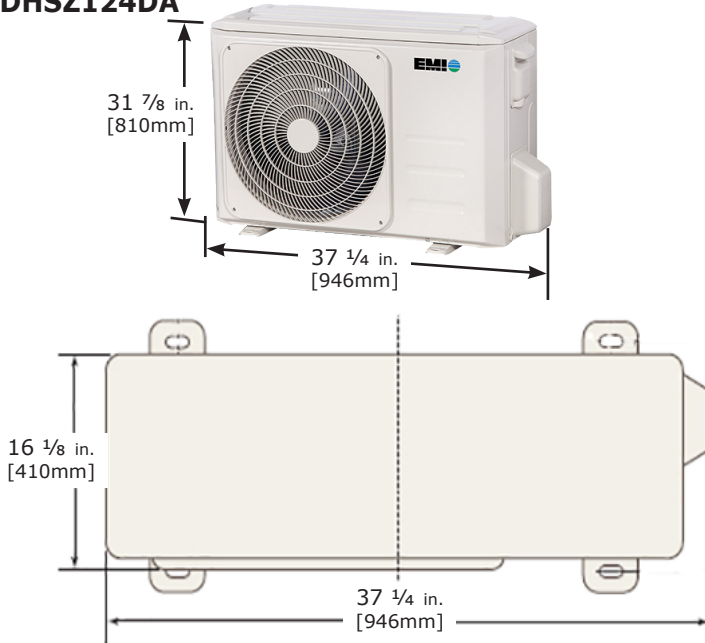

Handheld Remote Controller

Every EMI System comes with an easy to use handheld remote so you can adjust your comfort level at the touch of a button.

- Enabling "Follow Me" Technology.
When "Follow Me" mode is activated, the system switches from air handler-mounted room temperature sensor, to the sensor inside of the infrared handheld remote control. The unit conditions the space where you are, with the remote close at hand.
- Enabling Timer Modes - On a schedule? Control variety of settings with precision through the Timer Mode. Never worry about arriving to a cold home again. If the system stops due to power outage, it will automatically restart to its last setting when the power comes back.



Optional Wired Wall Thermostat

Instead of a hand-held remote controller, the unit can be wired to I-verter or Deluxe Heat wall mounted thermostat.



2201 Dwyer Avenue, Utica, NY 13501
Tel. 800 253 7900
www.ecrinternational.com

All specifications subject to change without notice.
©2020 ECR International, Inc.