



Single-Zone 18,000 Btuh Universal Variable-Speed Heat Pump Split System

Indoor Air Handler Model:

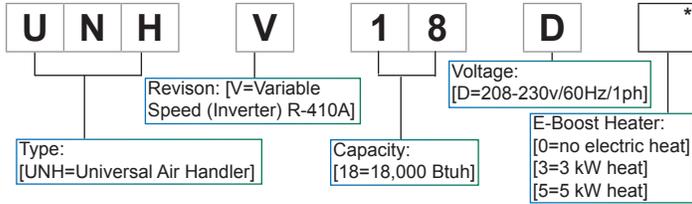

Note: A Handheld Infrared Remote Control comes with each, standard

Outdoor Condenser Model:

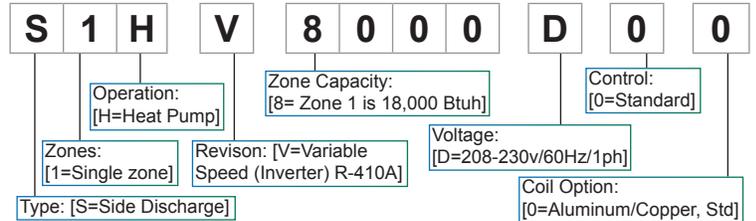

Coil Option: [0=Aluminum/Copper, Std]



Order Quantity of System	
Single-Zone 18,000Btuh Universal Variable-Speed Heat Pump Split System	

* Select Electric Heat option, exclusively available through dual point power.



Please indicate quantity of optional accessories for each system (max allowed)

Wired OEM Wall Control for indoor air handler (1) *Comes with a single 15' Interconnecting Cord Extension	Wind baffles / hail guard, architectural louver kit (required for cooling operation to 0°F (-18°C) (1)
15' Interconnecting Cord Extension for Wired OEM Wall Control (10)	Bi-flow Filter Drier (1)
208/230V Condensate Pump Kit, 48" lift (1)	Refrigerant line set, 25-feet (Both Tubes Insulated) (Max of 100 EQUIVALENT feet)
208/230V Condensate Pump Kit, 144" lift (External Mount Only) (1)	Refrigerant line set, 50-feet (Both Tubes Insulated) (Max of 100 EQUIVALENT feet)
Floor Mount Toe-kick/Trim Kit (Required to Internally Mount Condensate Pump in Floor Mounted Applications) (1)	Painted Metal Return Air Grille & Filter Kit (1)
Drain Pan Extension Kit (Req'd for Ceiling Mount Applications) (1)	MERV 11 High Efficiency Filter Kit (Comes with Painted Metal Return Air Grille) (1)
Boost Transformer for 115V Installation. (Not compatible with electric heat) (2-Dual Point Power, 1-Single Point Power)	Spare Handheld Infrared Remote Control, one already comes with every air handler

Electrical Specifications

Model #	Volts/Hz/Ph	Fan Motor		Elec Heat		Compressor		Total Amps	Min Volt.	MCA	HACR BRKR
		Amps	HP	Amps	kW	RLA	LRA				
S1HV8000D00	208/230/60/1	0.65	0.11	-	-	9.9	15	11.15	197	13.6	20
UNHV18D0	208/230/60/1	0.56	0.07	-	-	-	-	0.56	197	0.7	15
UNHV18D3	208/230/60/1	0.56	0.07	13.04	3	-	-	13.6	197	17	20
UNHV18D5	208/230/60/1	0.56	0.07	21.74	5	-	-	22.3	197	27.9	30



To: _____
 Date: _____
 From: _____
 Contact: _____

Project: _____
 Customer: _____
 Location: _____
 Engineer: _____
 Unit Tag# _____


For Your: Reference

Approval

Construction

Indoor Air Handler & Outdoor Condenser Dimensions

#	Description
1	Optional condensate pump floor-mount location (requires toe-kick/trim kit)
2	Discharge & return air flows
3	Minimum clearance for air flow and service access on both sides of cabinet
4	Minimum clearance (36") from discharge air outlet & return air intake, see #2
5	Holes (4) for mounting unit to wall or ceiling (1 1/16" Ø)
6	Optional knockout for customer supplied/installed fresh air intake (3" Ø)
7	1 5/8" x 3 3/8" knockouts for refrigerant tubing, condensate drainage and/or power
8	7/8" x 7/8" clearance hole for condensate drain tubing when ceiling mounted
9	Refrigeration line sets & condensate draining connections
10	Control & power electrical connections
11	Front proximity of #7-back knockout locations
12	1 5/8" x 3 3/8" side panel knockouts for tubing, condensate drainage and/or power
13	1 5/8" x 3 3/8" bottom, front knockouts for tubing, drainage and/or power
14	1 5/8" x 3 3/8" bottom, back knockouts for tubing, drainage and/or power
15	Optional toe-kick/trim: 1" bottom flanged, front & sides recessed 1/2", rear flush
16	Distance from cabinet side to 7/8" x 7/8" clearance hole (#8)

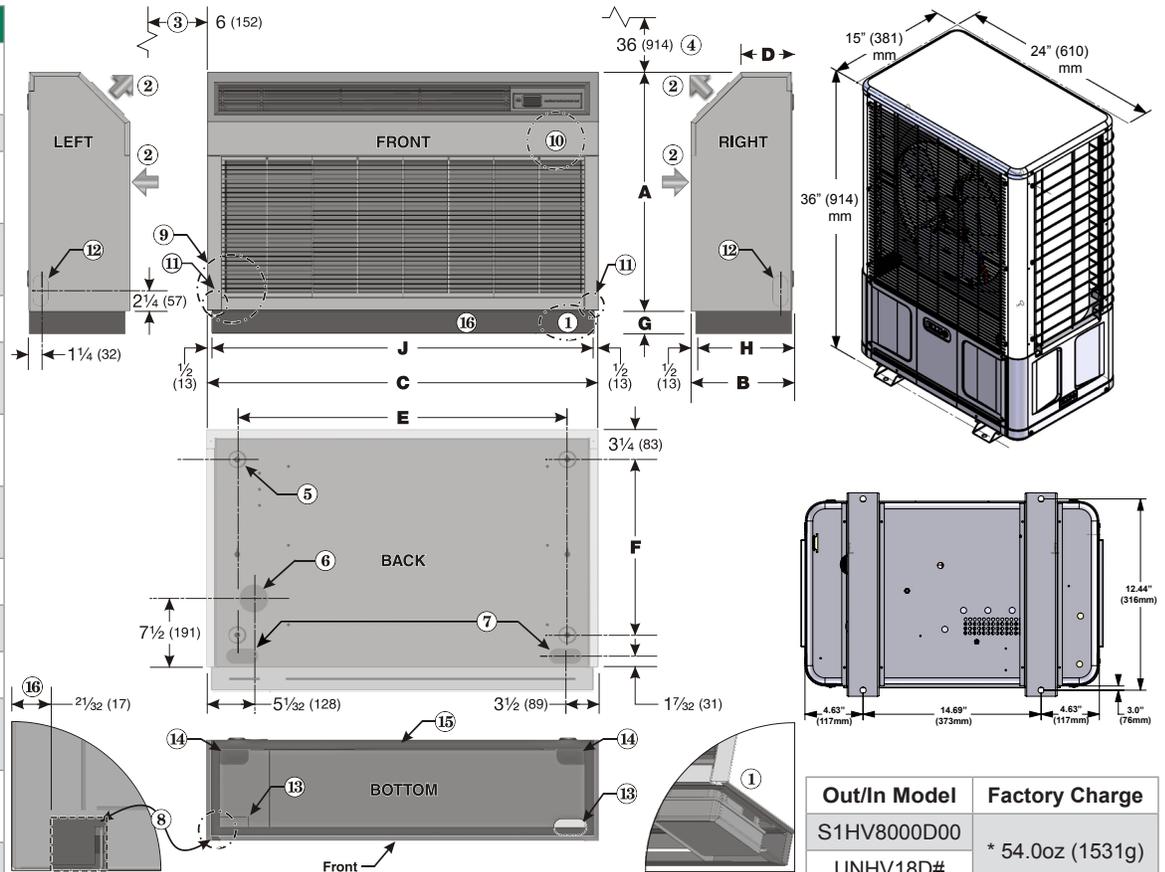

Dim	Inches	mm	Dim	Inches	mm	Dim	Inches	mm
A	26.00	660	D	5.50	140	G	2.50	64
B	11.00	279	E	45.00	1141	H	10.44	265
C	51.50	1308	F	19.19	487	J	50.50	1283

Out/In Model	Factory Charge
S1HV8000D00	* 54.0oz (1531g)
UNHV18D#	
Line Charge	0.64 oz/ft (59 g/m)

* Total charge for the condenser & air handler; condenser shipped from factory with that total charge


Performance — Heat Pump System With High Wall Units									
Condenser	Air Handler	Cooling Btuh(kW)	Heating Btuh(kW)	SEER	HSPF	SHR	EER	COP	Ref.
S1HV8000D00	UNHV18D0	18,000 (5.3)	18,000 (5.3)	17.0	9.5	0.73	13.0	3.5	R-410A

Suction Connection: 5/8", bush from 3/4" @ UNHV
Liquid Connection: 3/8"

Indoor Fan Details	High	Med	Low
Disch. Air Volume [CMF (L/S)]	700 (350)	625 (300)	550 (250)
Indoor Sound Levels [dBA]	45	42	40

Operating Range			
		Outdoor Ambient Temp	Indoor Ambient Temp
Cooling	Max	115°F (46°C) DB	90°F (32°C) DB
	Min	*0°F (-18°C) DB	66°F (19°C) DB
Heating	Max	70°F (21°C) DB	83°F (28°C) DB
	Min	-13°F (-25°C) DB	63°F (17°C) DB

*With optional wind baffles kit, otherwise the minimum temp will be 32°F (0°C)

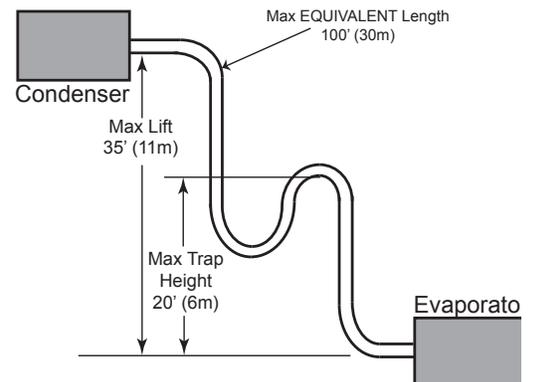

Enviromaster International

2201 Dwyer Avenue • Utica, New York 13501
Phone: 800.325.5479 • Fax: 866.432.7329
E-Mail: emi@enviromaster.com • Web: enviromaster.com

Miscellaneous Technical Data			
Condenser Weight	98 lbs (44.5 kg)	Condenser Sound Level (low/high)	65/68 dBA
Air Handler Weight	116 lbs (53.0 kg)	Condensate Pump Max Lift	*48" (1.2m) or
Air Handler Filter	1 washable mesh	* Measured from bottom of drain pan	*144" (3.7m)

NOTICE: Due to ongoing product development; design, specification and performance data listed within this submittal document are subject to change without notice. For the most current unit/system performance data, please refer to the ECR International listing of certified products in the AHRI directory, at www.ahridirectory.org. Please consult the factory for further information.